



www.anatol.com

SOLUTIONS

High Efficiency Electric Dryer

Superior Technology

- Up to 9 programmable job settings
- Automatic cool-down mode
- Intuitive touchscreen operating system

Available in configurations of:

- 24" belt width/4' heat chamber up to
- 60" belt width/9'6" heat chamber

Designed For Practicality

- Ceramic heating elements reduce future maintenance costs



Anatol Equipment Manufacturing Co.
919 Sherwood Drive, Lake Bluff, IL 60044
1.847.367.9760 sales@anatol.com



STANDARD FEATURES



Design and Construction

- Industrial grade AC motor
- Heavy-duty multiple section construction
- High efficiency thermal insulation prevents heat from migrating into the workplace
- Double wall construction with galvanized interior
- Air-cooled control cabinet



Options

- Custom dryer size (length and width)
- Infeed/outfeed extension(s) per customer requirements
- Outfeed cooling fan to boost ink cooling when substrate exits the heat chamber
- Single-phase wiring to accommodate facilities with single phase electricity



Heat Chamber

- Ceramic heating elements - 2"x 8" (9-48 total elements, depending on dryer configuration)
- Adjustable heat panels (raise and lower)

STANDARD FEATURES




Control Center

- User-friendly and intuitive touchscreen control system
- Solid-state variable belt speed controller
- Programmable temperature controller
- Work Schedule mode allows you to program the dryer to automatically start up and shut down at specified times on given days of the week
- View your daily power consumption and total power consumption to help you determine your energy costs and identify potential electrical issues



Conveyor System


- Industrial grade conveyor rollers
- Adjustable infeed/outfeed openings
- Teflon-coated fiberglass belt with digital speed control

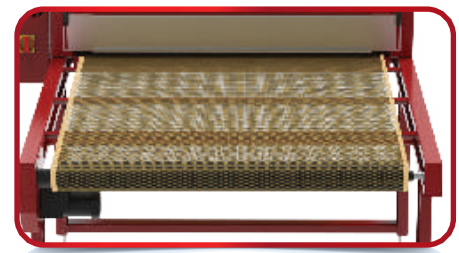

Model #	Belt Width	Heat Chamber with Smoke Hood	Overall Length	Smoke Hood Length	Standard Infeed/Outfeed Length	Wattage	Ceramic Elements	EU	USA	
								~3 400V	~1 L1,L2,PE	~3 (208V+PE)
SED2404	24" 61cm	4'0" 125 cm	9'0" 275 cm	0'10" 25 cm	2'6"/2'6" 75cm/75cm	5850 W	9	9 A	26 A	17 A
SED2404	24" 61cm	4'0" 125 cm	9'0" 275 cm	0'10" 25 cm	2'6"/2'6" 75cm/75cm	7800 W	12	12 A	35 A	23 A
SED2406	24" 61cm	6'0" 185 cm	11'0" 335 cm	0'10" 25 cm	2'6"/2'6" 75cm/75cm	11700 W	18	18 A	52 A	33 A
SED3606	36" 92cm	6'0" 185 cm	11'0" 335 cm	0'10" 25 cm	2'6"/2'6" 75cm/75cm	15600 W	24	24 A	69 A	44 A
SED3610	36" 92cm	9'5" 287 cm	19'5" 591 cm		5'0"/5'0" 150cm/150cm	23400 W	36	35 A	103 A	66 A
SED4806	48" 122cm	6'0" 185 cm	11'0" 335 cm	0'10" 25 cm	2'6"/2'6" 75cm/75cm	17550 W	27	34 A	101 A	65 A
SED4810	48" 122cm	9'5" 287 cm	19'5" 591 cm	0'10" 25 cm	5'0"/5'0" 150cm/150cm	27300 W	42	39 A	114 A	73 A
SED6010	60" 152cm	9'5" 287 cm	19'5" 591 cm	0'10" 25 cm	5'0"/5'0" 150cm/150cm	31200 W	48	46A	137 A	88 A



www.anatol.com

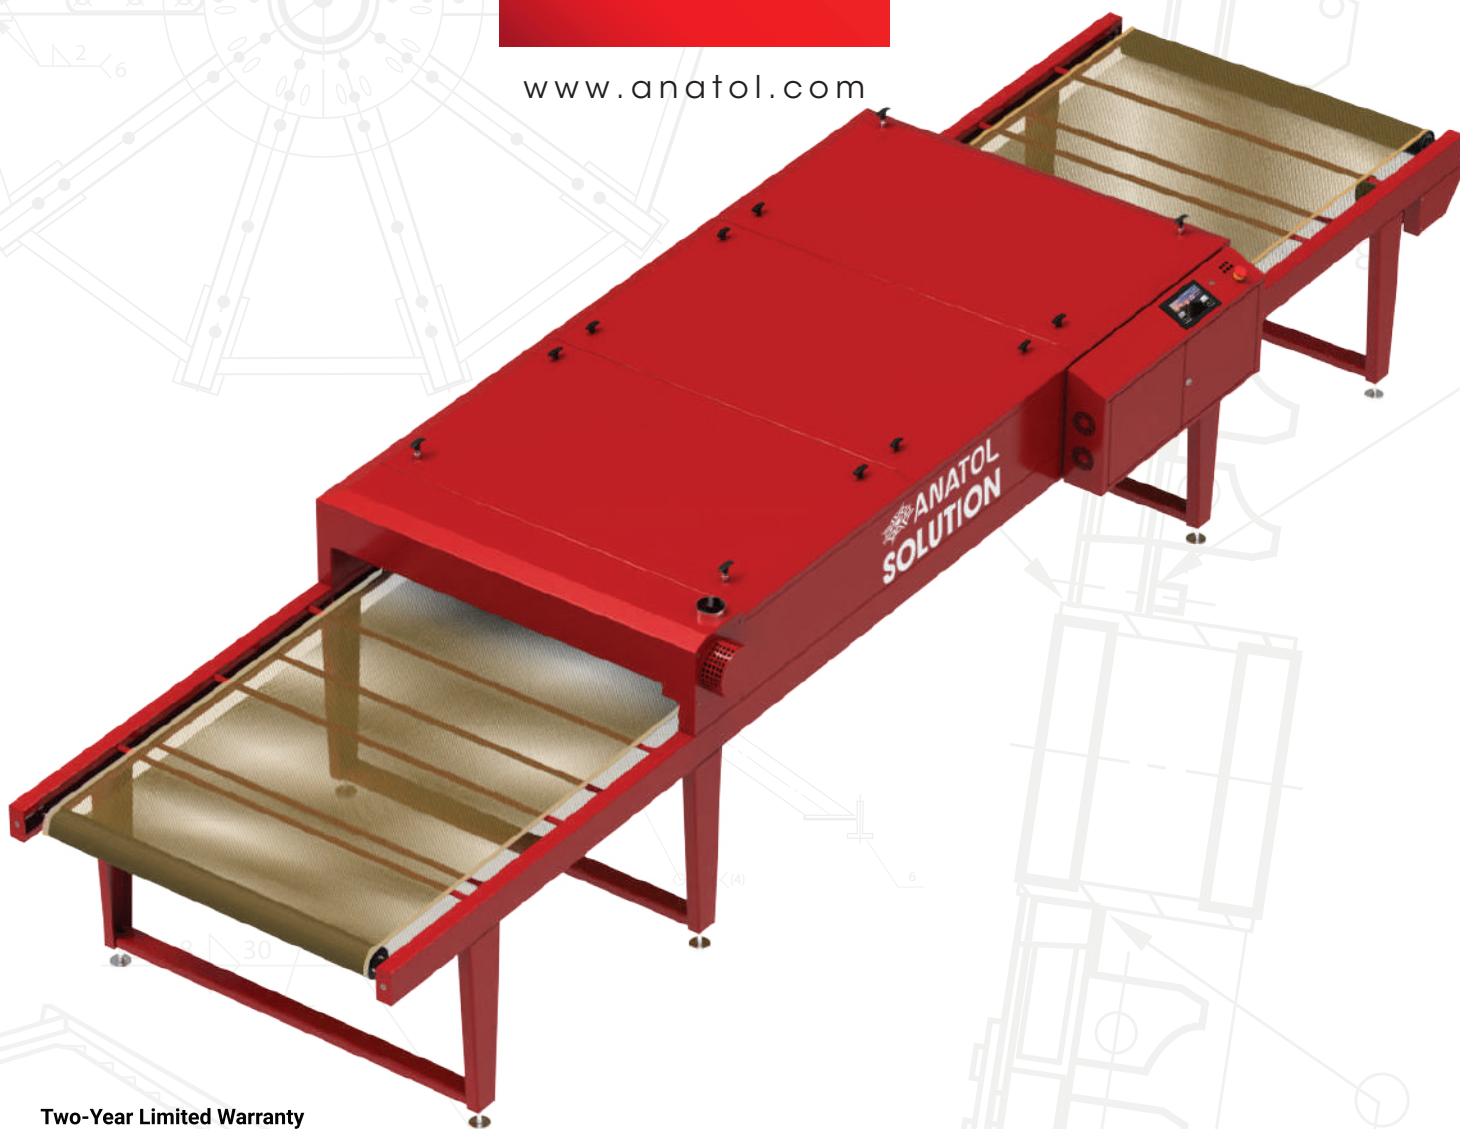

Two-Year Limited Warranty

Every effort has been made to ensure the accuracy of the promotional information included in this brochure. Specifications are subject to change. Anatol Equipment Manufacturing Co. and its subsidiaries, if any, expressly disclaim any liability for damages, consequential or incidental, resulting from the purchase, transportation, installation, or use of any products based upon information contained within this brochure. Any rights or remedies are limited solely to those provided in writing by Anatol Equipment Manufacturing Co. at the time of sale.

Visit our website
and learn more
about the products
www.anatol.com



Phone: 847-367-9760
Service: 847-582-1825



Fax: 847-582-1854



sales@anatol.com



**1429 S Shields Dr,
Waukegan, IL 60085 USA**