



www.anatol.com

ULTRA

**Electric Dryer for Curing
Water-Based and Plastisol**

- Unprecedented Control
- Cure All Ink Types Efficiently
- Available in four different configurations



Anatol Equipment Manufacturing Co.
919 Sherwood Drive, Lake Bluff, IL 60044
1.847.367.9760 sales@anatol.com



STANDARD FEATURES



Design and Construction

- Double wall construction with galvanized interior
- Heavy-duty multiple section construction
- Air cooled case keeps heat in and ensures the dryer stays cool to the touch
- High efficiency thermal insulation keeps heat from migrating into the workplace



Conveyor System

- Industrial-grade AC motor
- Heavy-duty conveyor rollers
- Teflon-coated fiberglass belt for maximum durability

STANDARD FEATURES



Options

- Custom dryer sizes available
- Infeed/outfeed extensions per customer requirements
- Outfeed cooling fan to boost ink cooling when substrate exits the heat chamber




Heat Chamber

- 5" blower exchanges air in the chamber over 12 times per minute to cure water-based inks quickly and efficiently
- Long-lasting ceramic heating elements ensure even distribution of heat throughout the chamber
- Overheating alarm warns you when dryer exceeds the temperature set by the user
- Adjustable infeed/outfeed openings to accommodate a wide variety of substrates



Control Center

- 7" touchscreen control panel
- Temperature control with accuracy of $\pm 1^{\circ}\text{F}$
- Set desired cure time and the dryer will automatically determine the proper belt speed
- Save and recall up to 16 jobs for fast setups
- Work Schedule mode allows you to program automatic startup and cool down based on the day of the week
- View temperature and energy consumption plots in real time

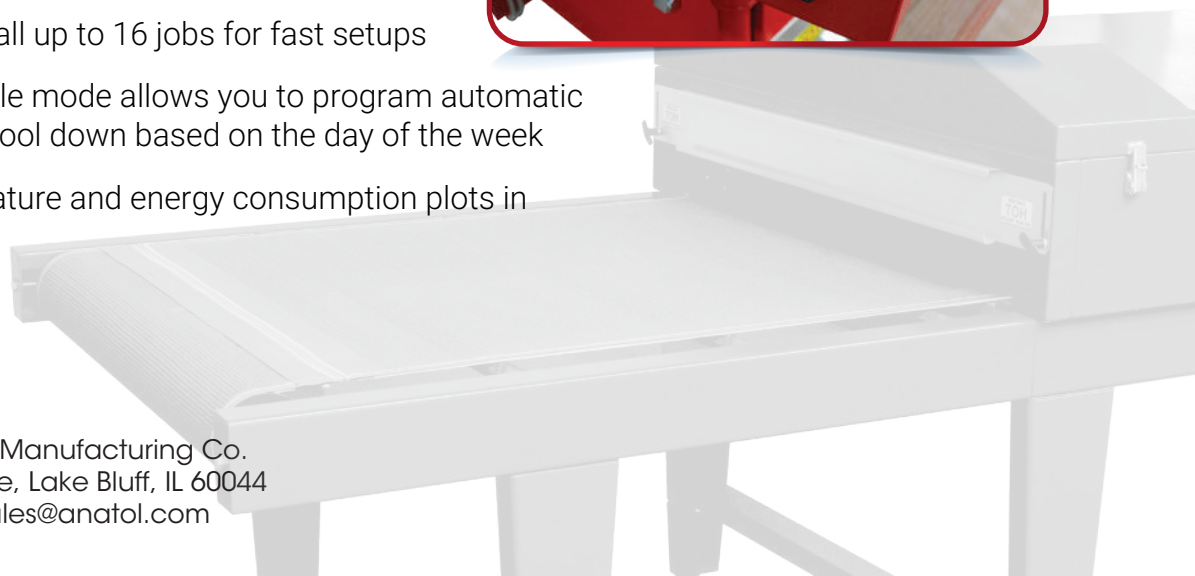



STANDARD FEATURES

Model #	Belt Width	Heat Chamber with Smoke Hood	Overall Length	Smoke Hood Length	Standard Infeed/Outfeed Length	Wattage	Ceramic Elements	EU	USA	
								~3 400V	~1 L1,L2/N 230V	~3 208V
UED3606	36" 92cm	6'11" 211 cm	16'11" 511 cm	0'11" 26 cm	5'0"/5'0" 150cm/150cm	15600 W	24	24 A	69 A	44 A
UED3610	36" 92cm	9'8" 294 cm	19'8" 594 cm	0'10" 25 cm	5'0"/5'0" 150cm/150cm	23400 W	36	35 A	103 A	66 A
UED4806	48" 122cm	6'11" 211 cm	16'11" 511 cm	0'11" 26 cm	5'0"/5'0" 150cm/150cm	19500 W	30	29 A	86 A	55 A
UED4810	48" 122cm	9'8" 294 cm	19'8" 594 cm	0'10" 25 cm	5'0"/5'0" 150cm/150cm	31200 W	48	46 A	137 A	88 A
UED6010	60" 152cm	9'8" 294 cm	19'8" 594 cm	0'10" 25 cm	5'0"/5'0" 150cm/150cm	35100 W	54	52 A	154 A	98 A



Two-Year Limited Warranty

Every effort has been made to ensure the accuracy of the promotional information included in this brochure. Specifications are subject to change. Anatol Equipment Manufacturing Co. and its subsidiaries, if any, expressly disclaim any liability for damages, consequential or incidental, resulting from the purchase, transportation, installation, or use of any products based upon information contained within this brochure. Any rights or remedies are limited solely to those provided in writing by Anatol Equipment Manufacturing Co. at the time of sale.

Visit our website
and learn more
about the products
www.anatol.com



Phone: 847-367-9760
Service: 847-582-1825



Fax: 847-582-1854



sales@anatol.com



1429 S Shields Dr,
Waukegan, IL 60085 USA